

FRONTIER POLI-VOID

Flexible Expansion Joint Material System

Frontier Poli-Void by Stegmeier LLC is available in three heights: 1-1/2", 3" and 4" with 3/8" perforated tear strip.

FRONTIER POLI-VOID INSTRUCTIONS:

To determine the size needed, check the coping. If you have just the depth of the coping, use the one and one-half inch. If the bond beam is notched or goes straight down from the bottom of the coping, use the three inch.

With the 3/8" tear strip in an upward position, apply spray adhesive one-half inch below the tear strip section so as not to interfere with the bonding of the joint sealant. The concrete is poured to the opposite side and edged with 1/4" edger. The deck (surface) should be allowed to cure before the 3/8" tear strip is removed and the Boss Joint Sealant is applied.




COMPRESSION, psi
at 10% deflection - less than 10
at 80% deflection - less than 125

MOISTURE VAPOR PERMEABILITY
perm inches - less than 0.4


WATER ABSORPTION
% volume - less than 0.5

DENSITY
Pounds/ft. 3 - 2.4 - 2.8

TEMPERATURE STABILITY
-18° to 150°

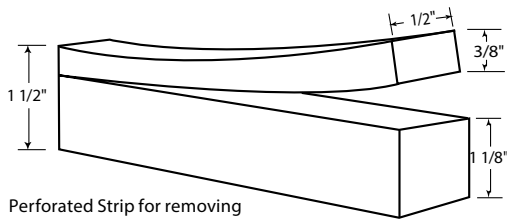

Perforated Strip for removing



SIZES AVAILABLE	RLS PER BUNDLE	PART# PACKAGE OPTIONS		RLS PER BUNDLE	PART# PACKAGE OPTIONS
		Corrugated	Plastic Bag		
1/4" x 1 1/2" x 120'	32	PV11B	PV11B-BAG	8	PV11B-BAG-4
1/4" x 3" x 120'	16	PV12B	PV12B-BAG	4	PV12B-BAG-4
1/2" x 1 1/2" x 60'	32	PV13B	PV13B-BAG	8	PV13B-BAG-4
1/2" x 3" x 60'	16	PV14B	PV14B-BAG	4	PV14B-BAG-4
1/4" x 4" x 120'	12	PV15B	PV15B-BAG	4	PV15B-BAG-4
1/2" x 4" x 60'	12	PV16B	PV16B-BAG	4	PV16B-BAG-4

STEGMEIER
LLC

www.stegmeier.com
Toll-Free (800) 382-5430

Arlington, TX • Henderson, NV

DOWNLOAD THE STEGMEIER LLC APP

